

PRE-PRIMARY PROJECT MATERIALS LIST: AREA ~ 130M². DWG: A03

STRIP OUT EXISTING LAWN & PLANTS. ~ 9M³. REMOVE.
FIT WEEDMATT ~ 100M².

2 x CUBBY STRUCTURES COMPLETE

LARGE ROCKS ~ 800-200KG, STABLE AND SELECTED. N° 21

LARGE GROUND LOGS 4-5M x 300-500mm φ SELECTED N° 5

VERTICAL HOLDING STICKS, SCULPTURED AND WORKED N° 7

TIMBER WATER TRAY N° 1. WATER PLAY ROCKS N° 2.

MULCH: ~ 24M³. WHITE SAND: ~ 7M³.

RECYCLED CONVEYOR BELT EDGING: 22M.

LARGE TIMBER STEPPERS: 16. PLANTS: ~ 12.

SLIDE SURROUND AREA DWG A01

EARTH AND SITE PREP: ~ 450M² (WEEDMATT?).

WALK TRAIL: ~ 60M LONG (CAN BE MULCH OR COMPACTED RIVERSTONE FINES)

MOUNDS AND SWALES: CREATE ~ 6 MOUNDS AND TWO SWALES.

LARGE ROCKS ~ 800-1.1 TONNE SELECTED N°: ~ 60.

LARGE GROUND LOGS 4-5M x 3-5 φ SELECTED N°: 26

1 x CUBBY STRUCTURE COMPLETE

5 x LARGE TRUCK TYRES COVERED IN ARTIFICIAL TURF.

LARGE TIMBER STEPPERS N°: ~ 37.

VERTICAL HOLDING TIMBERS N°: 27.

FORT TIMBER AROUND SLIDE DECK: 9M LONG TO INFILL.

SAND PIT: BOTTOM OF SLIDE & OTHER: ~ 5.5M³. WHITE SAND.

RECYCLE CONVEYOR BELT EDGING: ~ 10M.

MULCH: 105 M³. APPROX.

1 x LARGE BALANCING LOG WITH 4 x VERTICALS + ROPE.

3 x TALKING PIPES COMPLETE.

1 x BRASS BOWL FOR SMALL LIMESTONE WALL.

SNAKES, LADDERS AND FORTS DWG A02.

LARGE GROUND LOGS 4-5M, SELECTED N° 6.

LARGE ROCKS, SELECTED TO 1 TONNE N° 11.

VERTICAL HOLDING TIMBERS N°: 15.

2 x FORT AREA VERTICAL TIMBERS: 16.

2 x CONVEYOR BELT LADDERS, TOTAL 12-13M WITH 18-20 CROSS STICKS.

WHARF ROPE RECYCLED CLIMBING ROPES ~ 38M.


EARTHWORKS AND PATH CREATION APPROX 20M LONG x 1200 WIDE.

APPROX 30M PATH EDGING, WHARF ROPE.

OUTDOOR CLASSROOM DWG A02 APPROX 20M²

LARGE SELECTED ROCKS TO 1 TONNE: APPROX 8; APPROX 27M³ MULCH. (WEED MATT?)

LARGE TIMBER STEPPERS: 12; 1 x LARGE VERTICAL STUMP; APPROX 13M CONVEYOR BELT EDGING

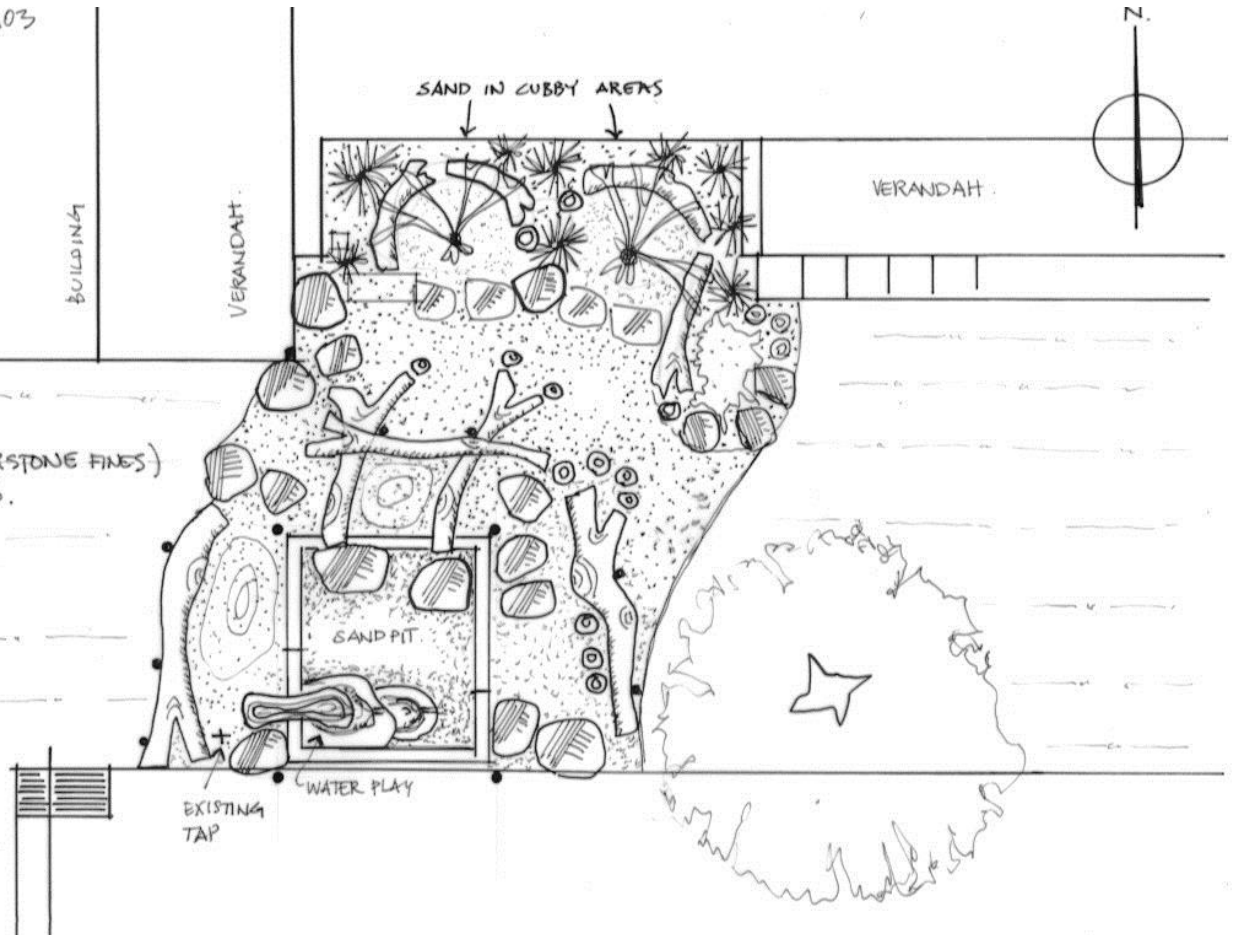

WINTERFOLD PRE-PRIMARY NATURE BASED PLAY CONCEPT DESIGN

1:100. TF 2016.

A03

